


Double Rams BOP

Double Rams BOP is offered by SEP in various configurations and is manufactured according to API 16A specification, 3rd edition and rated for standard H₂S services.

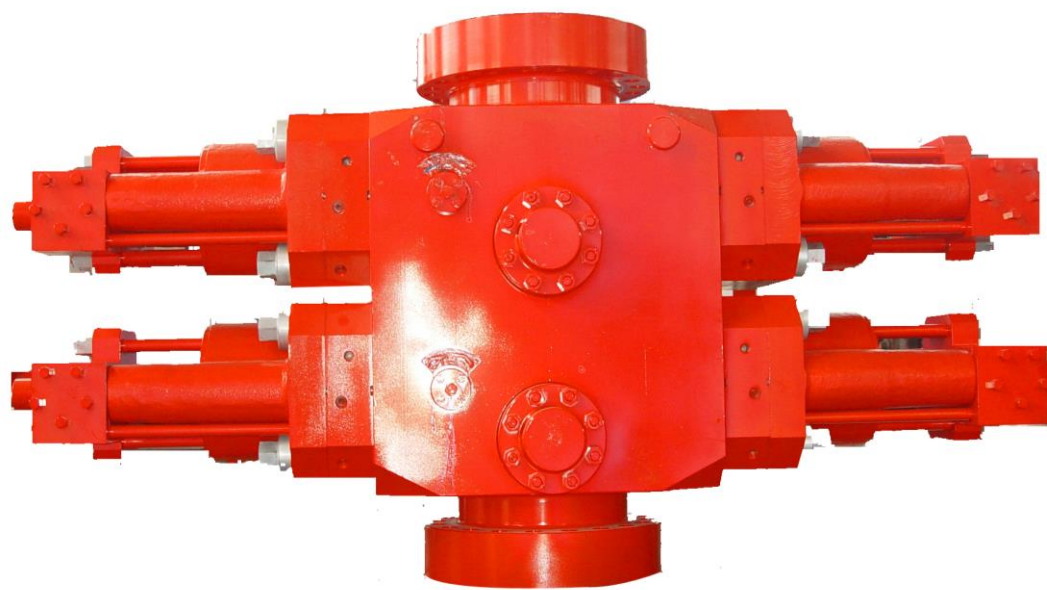

Model	2FZ18- 21	2FZ18- 35	2FZ18- 70	2FZ18- 105	2FZ23- 212	2FZ23- 35	2FZ28- 21	2FZ28- 35	2FZ28- 70	2FZ28- 105	2FZ35- 35	2FZ35- 70	2FZ35- 105	2FZ53- 21	2FZ53- 105
Bore size (in)	7/1/2016	7/1/2016	7/1/2016	7/1/2016	9	9	11	11	11	11	13-5/8	13-5/8	13-5/8	20-3/4	21-
Working Pressure (psi)	3000	5000	10,000	15,000	3000	5000	3000	5000	10,000	15,000	5000	10,000	15,000	3000	20-
Ring Groove	R45	R46	BX156	BX156	R49	R50	R53	R54	BX158	BX158	BX160	BX159	BX159	R74	R7
Type	C/S	C/S	C/S	C/S	S	S	C/S	C/S	C/S	C/S	C/S	C/S	C/S	C/S	C/
Gal. to Open	1.4/1.1	1.4/1.2	1.4/5.2	1.4/5.6	1.5	2.3	3.4/1.5	3.4/2.6	3.4/7.0	5.7/8.1	5.5/10.5	5.5/10.5	10.5/10.5	8.3/15.9	9.0/
Gal. to Close	1.4/1.1	1.4/1.5	1.4/5.3	1.4/6	1.8	2.6	3.5/1.8	3.5/3.0	3.5/9.5	5.8/9.4	5.4/11.0	5.4/10.6	10.6/11.6	8.7/16.6	8.7/
Hydraulic Connection NPT	1"	1"	1"	1"	1"	1"	1"	1"	1"	1"	1"	1"	1"	1"	1
Top Connec	Flanged / Studded														
Bottom Connec	Flanged / Studded														

Side Outlet (Studded)	N/A	2/1/2016	2/1/2016	2/1/2016	2/1/2016	2/1/2016	3/1/2008	3/1/2008	4/1/2016	4/1/2016	4/1/2016	4/1/2016	4/1/2016	4/1/2016	4/1/2016
--------------------------	-----	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------

Note:

- 1. Each specific model height to be determined by customer required top and bottom connections.
- 2. Side outlets also subject to change based on customer requirements.

